

WEB SEALING MACHINE





High Production
Output



Secured Shrinking



Easy to use



Consistent Quality



International Standards

A Web Sealer Machine with Shrink Tunnel is designed for high-volume packaging, combining robust sealing with precise shrink wrapping. It efficiently wraps and seals products in shrink film, followed by uniform heat application in the tunnel for a tight, professional finish. Ideal for heavyduty applications, it enhances product protection and presentation.

It offers high-speed operation, durable sealing, and uniform shrinkage with adjustable settings for various product sizes and shrink films.

It is used in industries like FMCG, beverages, electronics, and logistics for secure, protective, and visually appealing bulk packaging.



Easy to Operate

Designed with simplicity, our machine features an intuitive smart interface and straightforward controls, ensuring easy operation for all experience levels.


Easy Maintenanse

With a focus on convenience, our machine is engineered for easy maintenance, featuring accessible components and straightforward service procedures.

Rapid Tech Support

Benefit from our 24*7 rapid tech support, offering prompt assistance and solutions to minimize downtime and keep your machine running smoothly.

DIMENSIONS

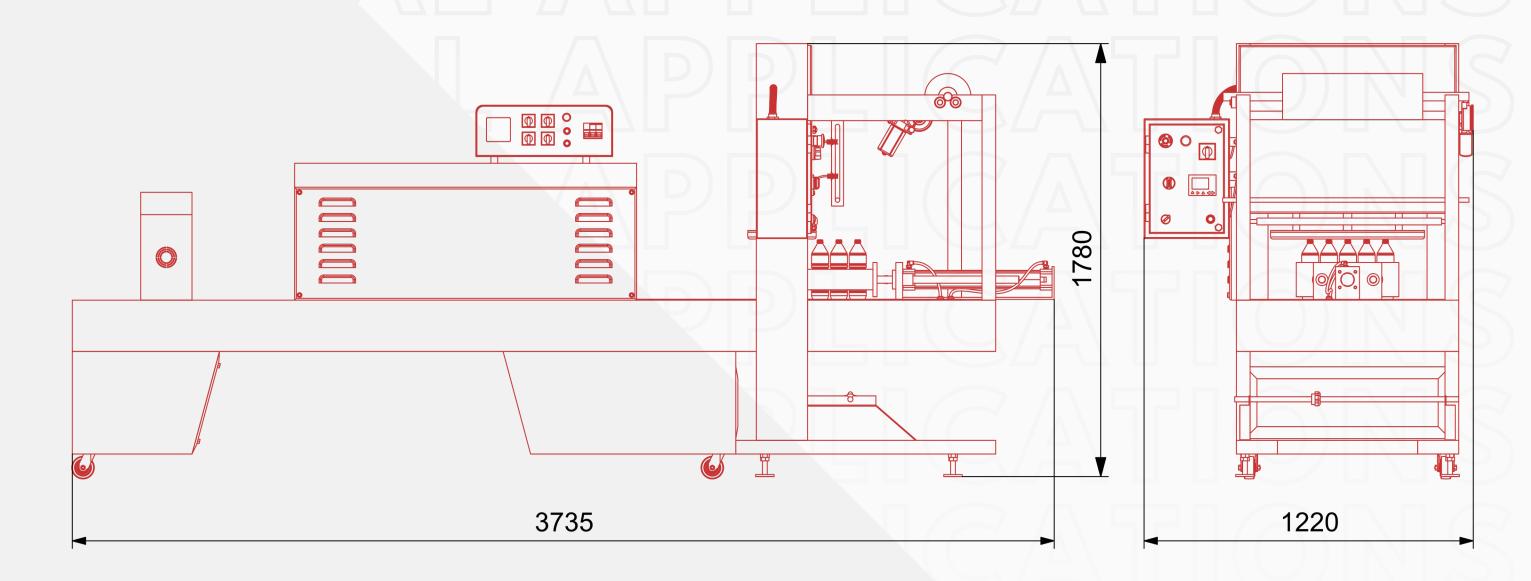

TECHNICAL SPECIFICATIONS

Web Sealer Size (L x W x H)	42" x 30" x 74"	Temperature Range	400 Degree
Sealing Size	26" (Hot Knife Technology)	Heater	30" (U type Finch)
Film Sealing Heater	1kw 1 Heater (S.S. Tubuler Heater)	Power	3 Ph. + N
Working Height	16"	Power Consumption	13 kw / 18 H.P.
Working Air Pressure	7 Kg.	M.O.C.	M.S. Powder Coated
Pneumatic Componants	Janatics	Total Machine Weight	~ 375 Kg.
Conveyor	M.S. Rod type with silicon sleeve	Maximum Packing Dimensions	18" x 13" (W x H)
Conveyor Motor	0.5 H.P. D.C. (1500 RPM)	Packing Speed	~ 6 Pack per Minute
Conveyor Load Capacity	150 Kg.		
Conveyor Speed	Variable (D.C. Drive)	Packing Material	L.D. Shrink Film
No. of Heaters & Heater Watt	30" (9 Pcs.) (1500 w)	Extra Requirement	Air Compressor (3 H.P.) (in the scope of purchaser)

^{*}The above mentioned values are indicative and can be modified at any time at the discretion of the company.